External Dimensions (mm)



Basic Specifications

Model		SM-5100B	SM-5100P	SM-5100EV		SM-5100BS		
Capacity		Max 3/6 kg		Max 6 / 15 kg		Max 15/30 kg		
Interval		e = 1/2 g		e = 2/5 g		e = 5 / 10 g		
Display		32 x 202 Full Dot Matrix LCD with Back-Light (Top Row : 5 x 10 Dots / Character , Bottom Row : 7 x 12 Dots / Character)						
Number of Preset Keys		32	56	56	72	32	120	
Memory Capacity		2MB (Standard) 8MB (Max)						
Display Resolution		1 / 3,000						
Paper Width	·Width		Max 60 mm (Label) 60 mm (Receipt)					
Printing Speed		80 mm/sec (Label) 105 mm/sec (Receipt) PRINT WIDTH: 56mm						
Label Size	_abel Size		Maximum 60 (W) x 220 (L) mm					
Power Source		AC 100 / 110 / 220 / 230 / 240 Volts (50 / 60 Hz.)						
Operating Temperatu	ıre	-10 °C to +40 °C						
Standard Interface		RS232C, Ethernet I/F (10/100mbps), Cash Drawer I/F						
Optional Interface		Wireless LAN I/F (IEEE 802.11b/g)						
Dimensions (mm) (W) x (D) x (H)		376 x 445 x 146.6	385 x 445 x 581.7	385 x 470 x 492	385 x 383.2 x 724.9	385 x 383 x 609.4	385 x 383 x 725.4	
Model	;	SM-5100EV-PL	US	SM-5100P-PLUS		SM-5100BS-PLUS		
Capacity			3/6kg	6/1	6kg 15/30kg			
CPU		1.6GHz Atom N2600(Fanless)						
Keyboard		56Prese	t keys+27Fund	tion keys	27Function keys+18.5inch TFT-LCD for self-service application			
Display	OP dis Custor CU2:12	isplay: LCD Dot module(202*32) mer display: CU1:LCD Dot module(202*32) 2.1 inch TFT-LCD with touch panel for cross promotion/shopping list/manual queuing Oprating display 1:LCD Dot module(202*32) Oprating display 2:16:9 18.5 inch TFT-LCD with touch						
Memory		1)2M SRAM(MAX.8M) for scale 2)DDRIII 2G SODIMM(Max.2G) for CV05						
HD		WD 2.5"SATA 320G						
Pingter		Thermal printer Width:60mm, Speed:105mm/s						
Standard Interface		2xLAN 2xUSB 1xRS232 1xVGA						
Supported		E-label/Hi-touch/Info Card						

*Specifications are subject to change without prior notice.

TERAOKA SEIKO CO., LTD. TERAOKA WEIGH-SYSTEM PTE LTD. SHANGHAI TERAOKA ELECTRONIC CO., LTD.

13-12 Kugahara 5-chome, Ohta-ku, Tokyo 146-8580, JAPAN TEL: +81-3-3752-2131 FAX: +81-3-3752-2801

URL: http://www.digisystem.com E-MAIL: info@hq.digi.co.jp

4, Leng Kee Road, #06-01, SIS Building,

SINGAPORE 159088

TEL: +65-6861-3911

FAX: +65-6861-3144

TINGLIN INDUSTRY DEVELOPMENTAL ZONE, JINSHAN COUNTY, SHANGHAI 201505 TEL: +86-21-57234888

FAX: +86-21-57233049 http://www.digisystem.com



SM-5100

Scale Printer

Powerful Features in a Compact Scale Printer



Searching for a New Balance


SMI-5100 -

versafile scale printer for store operations

Weigh quickly, print rapidly to increase throughput.

SM-5100 desighed to meet the weighing needs of any retail store.

This Series provides the best value for your store's operation.

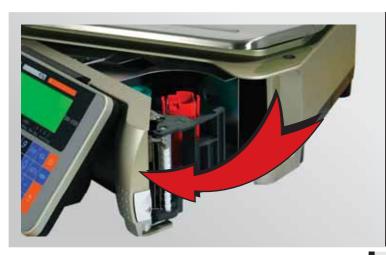

Easy to Change Label & Receipt

Changing the thermal paper roll is easy through the large opening in the scale housing which enables quick loading of the label or receipt roll.

Compact Design for Save Space

Effective use of sales space, shorten the distance of communication with customer.





Free Angle of Operator Panel and Water Resistant Keyboard

Free angle adjustment of operator panel for easy operation.
Water resistant membrane keyboard stands up to frequent use.



Large & Clear Display

Customer and operators can easily read the bright alpha-numeric LCD with back-light.

Large characters display the product name or scroll messages for promotions or store specials.

POWERFUL COMMUNICATION CAPABILITIES STANDARD

- Through the standard Ethernet or RS-232 interface, inter-scale and store controller communication is readily available.
- With the Wireless LAN network interface, scale installation locations can quickly change without added costs.

(wireless network card is optional.)

- Quick weight stabilization and fast label / receipt printing allows the operator to serve more customers and increase volume of the operation.
- Barcode Scanner can also be connected to enhance the operation.
- Nutritional facts and traceability information can be easily designed and printed for better customer service.