


External Dimensions (mm)



e.Label Attachment

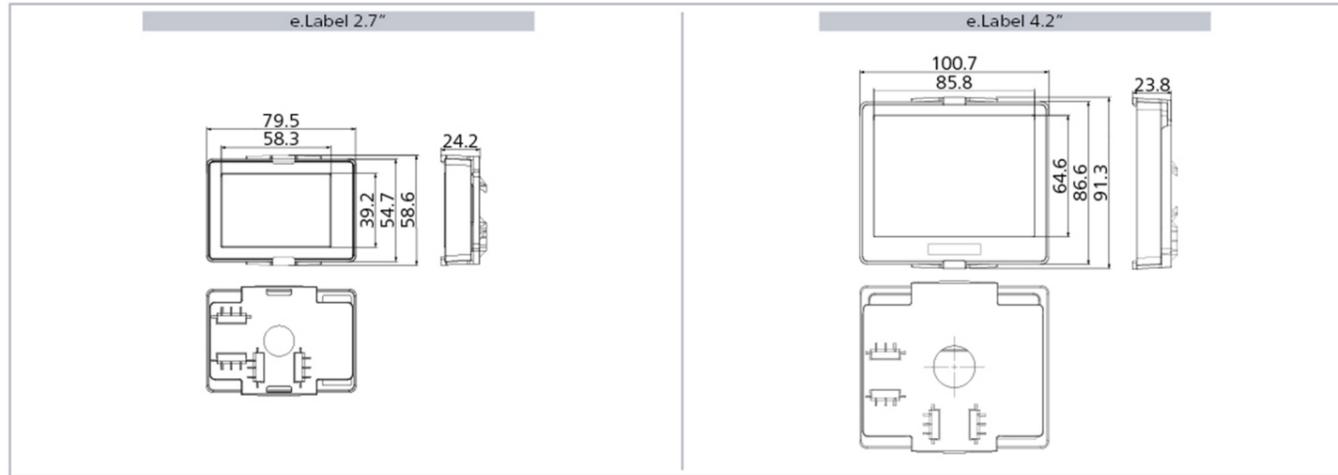

Specifications

Model	e.Label 2.7"	e.Label 4.2"
Image		
Dimension WxHxD (mm)	80 x 59 x 24	101 x 91 x 24
Screen Size	2.7"	4.2"
Display Size (Pixels)	264 x 176	400 x 300
Display Size (mm)	58 x 39	86 x 65
Resolution (DPI)	117	120
Built-in	Hi-Touch	
Case Colour	Black	
Display Colours	Black, White and Red	
Operating Temperature	0°C to 40°C*	
Operating Humidity	85% Max. RH Non-Condensing	
Frequency Band	2.410GHz ~ 2.480GHz	
NFC	Yes	
IP Rating	IP67	
Compliance	CE, RoHS, FCC, RCM	
Power Source	3 x DC Cell Button Battery 3.0V (Non-Serviceable)	
Net Weight	82 g	142 g
Option	Base Station	

*Subject to environmental condition and usage

• Specifications are subject to change without prior notice



e.Label

Dependable Pricing Essential



DIGI SINGAPORE Pte. Ltd.

4 Leng Kee Road #05-02/03/04/05/11/12
 SIS Building SINGAPORE 159088
 TEL : +65 6472 2996
 SALES: +65 6378 5387
 FAX : +65 6863 4614
 URL : www.digisystem.com/sg/
 E-MAIL : customer_support@sg.digi-group.com

TERAOKA SEIKO CO., LTD.

13-12 Kugahara 5-chome, Ohta-ku,
 Tokyo 146-8580, JAPAN
 TEL: +81-3-3752-2131
 FAX: +81-3-3752-5562
 URL: www.digisystem.com

e.Label (3C) / A / 1024S

Searching for a New Balance

STRONGER TOGETHER: LEVERAGING DIGI ECOSYSTEM

Sync seamlessly with compatible SM & DP/DPS scale for greater productivity.



e.Label..



REDUCE SHRINKAGE

- Minimise errors
- Protect margins



OPTIMISE RESOURCES

- Free up manpower & expenses on paper tags

BENEFITS



PRICE AGILITY

- Automated price update



FLEXIBLE PROMOTION

- Customisable tag design



PRODUCT TRACEABILITY

- Offer visibility on product's supply chain information



HIGHLY SCALABLE

- Scale e.Label's quantity according to the store's needs.

Hi-Touch

Hassle-free PLU callup via built-in tap sensor



01 TAP e.Label of selected item to transmit PLU to scale.



02 SELECT PLU and **WEIGH** item.



03 PRINT label.

IP-67 | 3 Colors | Hi-Touch



FEATURES



IDEAL FOR WET ENVIRONMENT

- IP67-certified
- Water and dust resistant



WIDE OPERATING TEMPERATURE

- 0 °C to 40 °C



FAST & ACCURATE

- Hi-Touch function
- Hassle-free PLU call up



ADAPTABLE MOUNTING

- Compatible with multiple accessories



TWO DISPLAY SIZES

- 2.7" and 4.2"



HIGH CLARITY

- High definition e-Paper
- 3-colour display (B/W/R)



POWER OF RED

- Speed up buying decisions by showing key info in red



EXTENDED LIFESPAN

- Replaceable battery prolongs lifespan
- Cost-effective, minimize electronic waste