



LX-5600

Fully Integrated Weigh-Seal-Label MAP Tray Sealer

Specifications

Wrapping

Package Size #1 W230xD150mm (W9.1xD5.9 inches)
 #2 W250xD180mm (W9.8xD7.1 inches)
 #3 W300xD210mm (W11.8xD8.2 inches)
 Height: 15-90mm (0.6-3.5 inches)
 * Contact us for custom sizes

Packing Speed Top sealing only: Max 17 packages/min
 Gas flushing: 10-15 packages/min
 *Depends on gas fill time

Film Width 260-360mm
 Film Diameter Max φ250mm (Exp, 25μ=1,700m)

Operation Console

Display Panel 15 inches TFT color LCD with touch panel
 Operation Keys Mechanical keys and touch screen
 Memory for Programmable Files 18GB SD

General

Power source and Consumption AC 200-240V, 1 phase, 50/60Hz ; 1.2 kVA
 Net Weight Approx. 230kg
 Operating Temperature 10 to 30°C with no condensation
 Operating Humidity 80% RH (Max) with no condensation

Labeler variation

TWIN Labeler, POP Labeler, BP Labeler


Weighing

Interval Type	Multi-Interval		Single Interval
Capacity	Max 3/6kg	Max 6/15kg	Max 30 lb
Scale Interval	e=1/2g	e=2/5g	e=0.01 lb
Weighing Range	20g-6kg	40g-15kg	0.20-30 lb
Wrapping Capacity	50g-3kg		0.11lb-6.6lb

Printer and Labeler

Label Type	Linerless Label	Die-Cut Label
Main, POP Label	W: 44, 59mm/1.73, 2.3inches H: 28-105mm/1.1-4.1inches	W: 40-80mm/1.6-3.1inches H: 28-105mm/1.1-4.1inches
BP Label	W: 44, 59mm/1.73, 2.3inches H: 40-105mm/1.6-4.1inches	—
Dot Density	12 dot/mm (300dpi)	
Label Roll Diameter	Max 210mm (8.2inches)	
Label Roll Core Diameter	76mm (3.0inches)	
Dot Density	12 dot/mm (300dpi)	


Dimensions

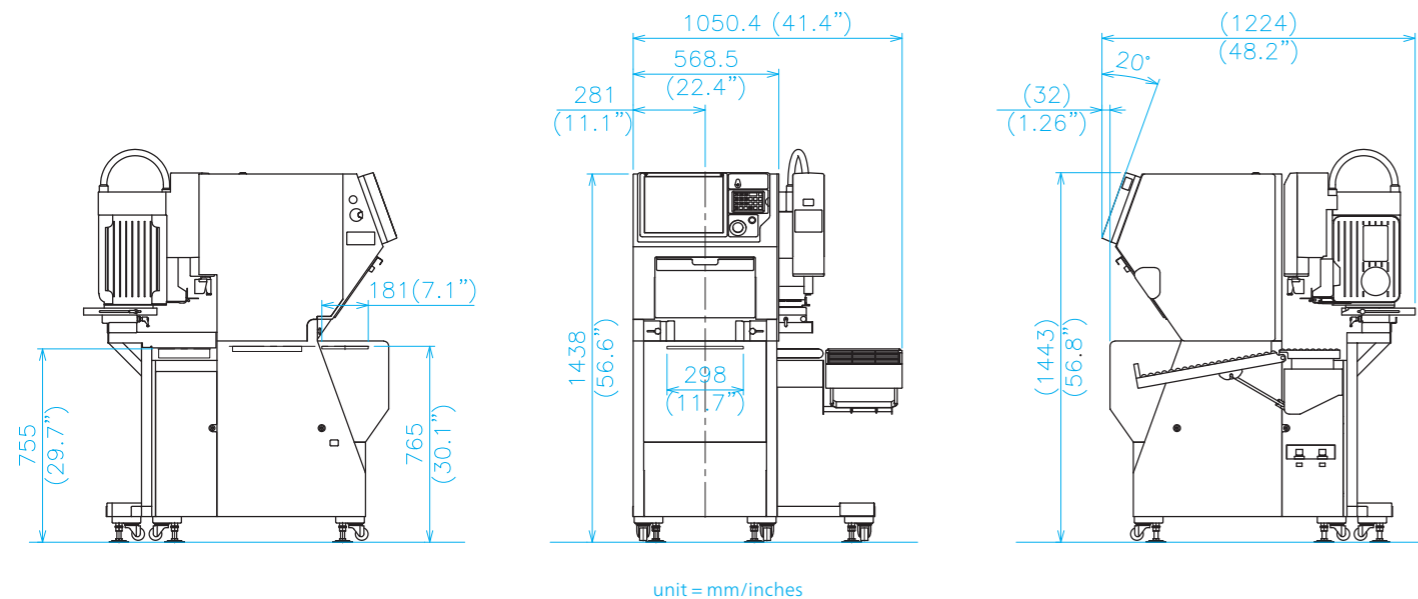

*Specifications are subject to change without prior notice.

TERAOKA SEIKO Co., Ltd.

13-12 Kugahara 5-chome, Ohta-ku,
 Tokyo 146-8580 JAPAN
 www.digisystem.com




000000210



Searching for a New Balance

LX-5600

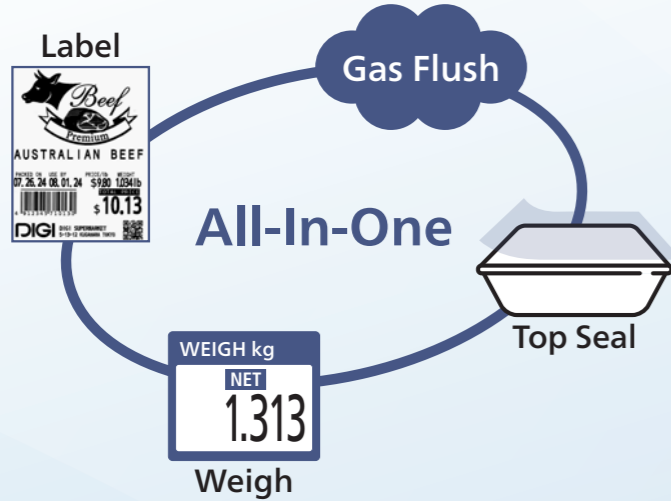

Multi-Labeling


Up to three labels are simultaneously applied on a tray – two on top and one on the bottom side.

Labeler Variation

Twin labeler, POP labeler, and BP labeler are available.

Mold Storage

Convenient interior mold storage space enhances operational ease.

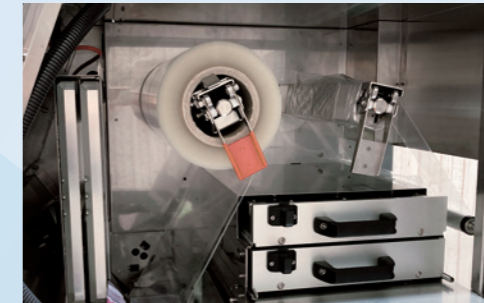

Gas Setting per PLU

Two types of gases for each item are easily switched.

Energy-Saving


Lower power consumption due to no vacuum pump and compressor.
Reduced consumption of food-safe gas through gas flushing technology.

Compact

Small footprint of just 1.3m² allows for flexible installation layouts, easily fitting into backroom spaces.

Easy Mold Change

No tool is required for mold change.
Compact and lightweight design simplifies its process and allows quick change with minimal effort.

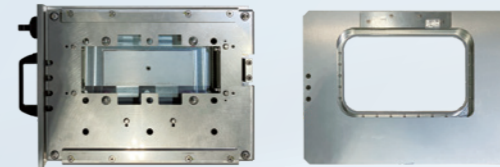

Solutions


Package & Backroom

Minimize "3 Major Losses" at Stores by Extending Shelf Life



DISPOSAL LOSS

due to extended availability on the shelves.

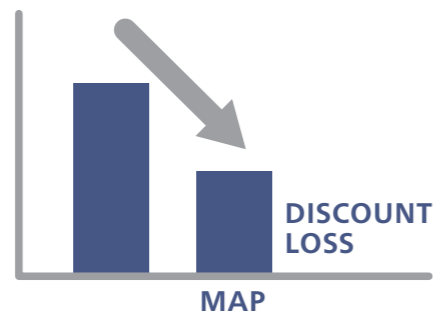

DISCOUNT LOSS

from products approaching their expiration.



SALES OPPORTUNITY LOSS

with shelves constantly stocked from store opening to closing.

